


WIIZARD USER GUIDE - WWW.WIIZARDMOD.COM

- 1.Short your Region Jumper , EURO PAL Region by Default
- 2.Short your Drive Board Jumper , D2C by Default , Use D2A+D2B for D2C2
- 3.Install your Wiizard modchip according to the schematic below , use 5 wires for D2A/DMS/D2B and 9 wires for D2C/D2C2 Drive Models
- 4.Take your time to ensure a clean,organized and reviewed installation
- 5.Alternative X is recommended for NON professional installers/modders

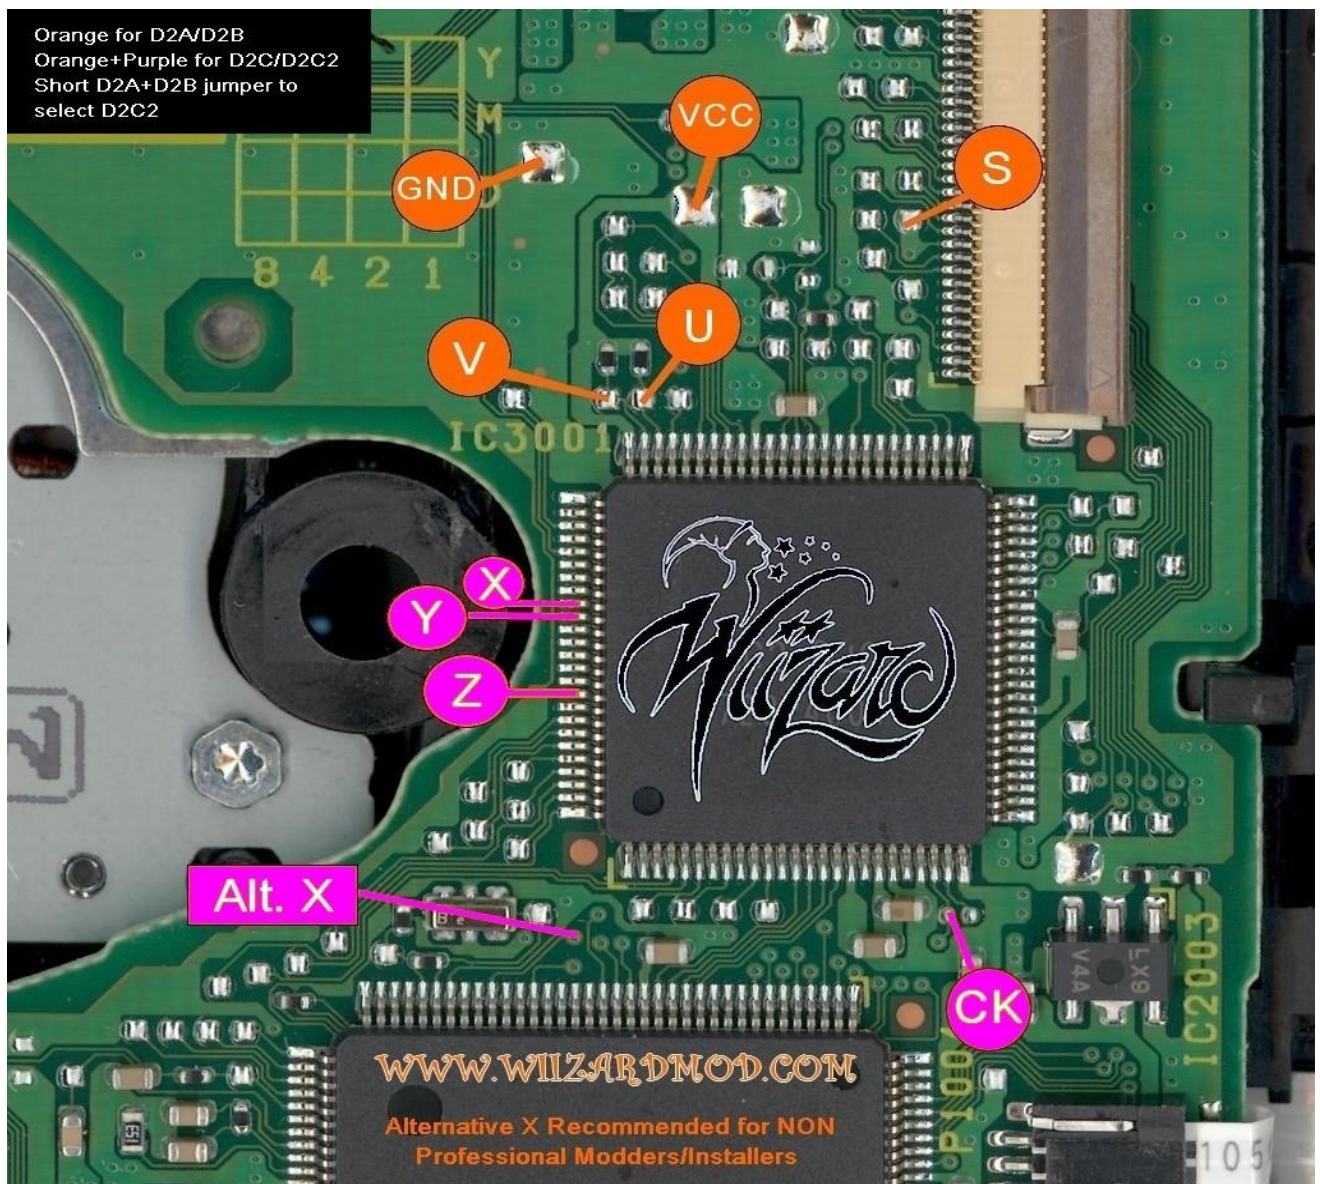

UPGRADING

You only need Upgrade the Wiizard Mod flash content when some new feature is made . Simply burn the Gamecube ISO supplied , run it and wait until the upgrade process finishes . A DOL File will be released to make the upgrade process possible on Korean and GAMECUBE MODE Limited wii consoles if needed



```
Wiizard Firmware Updater
Please Do Not Turn off your Wii

Erasing Wiizard's SPI:
DONE!
Flashing Wiizard's SPI:
flashing at 0x00002f00, 136 bytes

Finished, You can reboot your Wii NOW!
```

WWW.WIIZARDMOD.COM

Recovery Mode makes it possible to re-upgrade your Wiizard mod after a bad flashing process, this requires one additional wire be soldered to the central pad on the SW2 reset button

